


GLV-40D2

PM Traction Machine

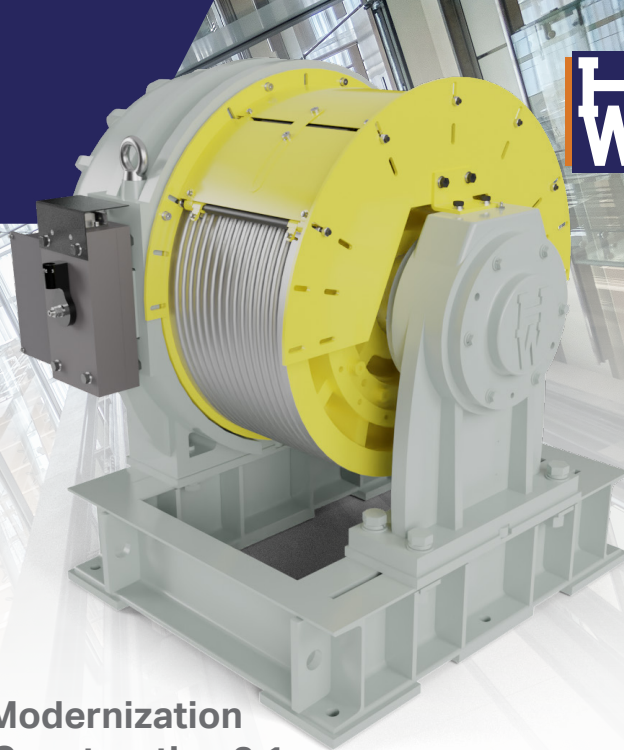

COMPACT EFFICIENT VERSATILE

**Ideal for Modernization
and New Construction 2:1
Double Wrap Traction (DWT)
Overhead Traction Applications**

GENERAL SPECIFICATIONS

- Model: GLV-40D2
- Speed: Up to 800 fpm
- Capacity: Up to 4,000 Lbs.
- Roping: 2:1 – Double Wrap Traction
- Drive Sheave Diameter: 20" or 25"
- Maximum Sheave Shaft Load: 22,000 Lbs.
- Grooving: Up to 16 – 1/2" (20" Drive Sheave) or 14 – 5/8" (25" Drive Sheave) Ropes
- Counterweight %: 40 - 50%
- Machine Weight: 3,190 Lbs.
- Physical Dimensions: 39.82" W x 39.58" H x 34.68" D

BENEFITS

- Compact Design Inclusive of Outboard Bearing Post
- Armless Block Brakes – Quiet | Fewer Moving Parts
- 40 – 50% Counterweighting¹
- High-Grade Rare Earth Magnets – High Torque, Low Temperature
- Highly Efficient / Lower Power Consumption
- Low Audible Noise
- Passenger Comfort - Smooth Stepless Motor Control
- Low Force Required for Manual Brake Release

STANDARD FEATURES

- Superior 30 Pole PMAC Motor Technology
- Four Block Brakes – Sets of Two are Independently Controlled and capable of stopping and holding 125% of rated capacity²
- Sheave Removal / Replacement Using Standard Field Tools
- Serviceable Bearings
- Heidenhain ECN 1313 - 2048 PPR - EnDat Digital Encoder with Standard 60 in. Pigtail Fitted with Round 17 PIN Coupling
- Thermal Protection Device
- Rope Retention – Continuous Adjustable to Arc of Contact
- 380 VAC
- CSA listed

¹ Data is based on 50% counterweighting. Please contact your Hollister Whitney sales professional for lower counterweight percentages. Be sure to check www.hollisterwhitney.com/products/ regularly for product updates.

² Although a rope brake is optional, Hollister Whitney GL machines are designed to incorporate the RopeGripper® which acts directly on the suspension means mitigating the risks associated with loss of traction.

OPTIONS




- Breakdown | Crating | Factory Personnel Reassembly Service
- Machine Bases With Deflector Sheave and Vibratory Isolation
- RopeGripper® Compatible²
- Shielded Encoder Cable Lengths - **KEB**: 15m (49 ft), 20m (65 ft), 30m (98 ft), 40m (131 ft), 50m (164 ft) and 75m (246 ft) | **Magnatek**: 20m (65 ft), 40m (131 ft), 50m (164 ft) and 100m (328 ft)
- Rope Guards
- Loose Deflector Sheaves
- Modernization and New Construction Design Services
- New Construction Complete Running Platforms Available
- Custom Grooving for Specific Applications

GLV-40D2 (20" WHEEL)

HW PART #	SPEED (FPM)	CAPACITY (LBS)	MOTOR RATING (HP)	POLES	RATED (RPM)	RATED VOLTAGE	RATED FREQ (HZ)	RATED CURRENT (A)	RATED TORQUE (FT-LBS)	MAXACCEL TORQUE (FT-LBS)	CWT (%)	SHEAVE DIA(")
GLV-40D2-A-V407A	400	2500	20.4	30	153	380	38.3	32.6	701	1402	50	20
GLV-40D2-A-V408A	700	2500	35.7	30	268	380	67	57.6	701	1402	50	20
GLV-40D2-A-V409A	800	2500	40.8	30	306	380	76.5	65.4	701	1402	50	20
GLV-40D2-B-V407A	400	3500	28.3	30	153	380	38.3	46.9	974	1948	50	20
GLV-40D2-B-V408A	700	3500	49.6	30	268	380	67	82.0	974	1948	50	20
GLV-40D2-B-V409A	800	3500	56.7	30	306	380	76.5	91.5	974	1948	50	20
GLV-40D2-C-V407A	400	4000	31.9	30	153	380	38.3	52.5	1096	2192	50	20
GLV-40D2-C-V408A	700	4000	55.8	30	268	380	67	91.7	1096	2192	50	20
GLV-40D2-C-V409A	800	4000	63.8	30	306	380	76.5	104.7	1096	2192	50	20

GLV-40D2 (25" WHEEL)

HW PART #	SPEED (FPM)	CAPACITY (LBS)	MOTOR RATING (HP)	POLES	RATED (RPM)	RATED VOLTAGE	RATED FREQ (HZ)	RATED CURRENT (A)	RATED TORQUE (FT-LBS)	MAXACCEL TORQUE (FT-LBS)	CWT (%)	SHEAVE DIA(")
GLV-40D2-A-V407B	400	2500	20.4	30	122	380	30.5	32.6	878	1756	50	20
GLV-40D2-A-V408B	700	2500	35.7	30	214	380	53.5	57.6	878	1756	50	20
GLV-40D2-A-V409B	800	2500	40.7	30	244	380	61	65.4	878	1756	50	20
GLV-40D2-B-V407B	400	3500	28.2	30	122	380	30.5	46.9	1218	2436	50	20
GLV-40D2-B-V408B	700	3500	49.5	30	214	380	53.5	82.0	1218	2436	50	20
GLV-40D2-B-V409B	800	3500	56.5	30	244	380	61	91.5	1218	2436	50	20
GLV-40D2-C-V407B	400	4000	31.8	30	122	380	30.5	52.5	1372	2744	50	20
GLV-40D2-C-V408B	700	4000	55.9	30	214	380	53.5	91.7	1372	2744	50	20
GLV-40D2-C-V409B	800	4000	63.7	30	244	380	61	104.9	1372	2744	50	20

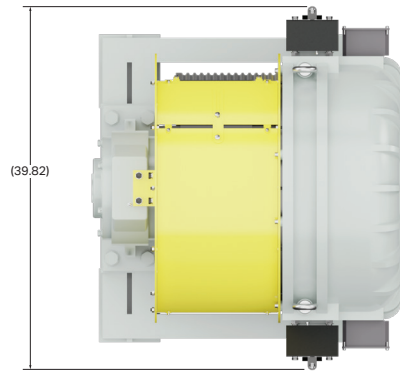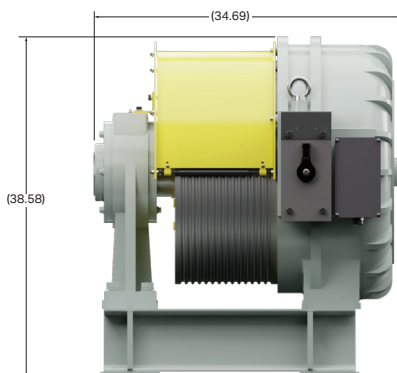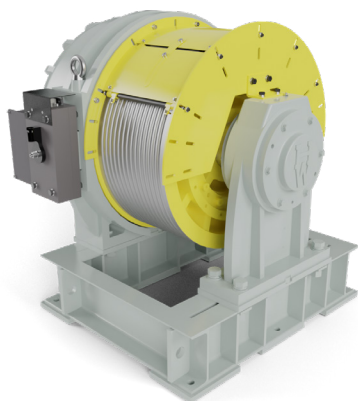

1 Hollister-Whitney Parkway
Quincy, IL 62305
Ph: 217.222.0466
Fax: 217.222.0493

info@hollisterwhitney.com
www.hollisterwhitney.com
sales@vantageelevation.com
www.vantageelevation.com



Chicago 877.300.5830
New York 347.226.4555
Miami 877.241.9354
L.A. 877.300.5816
Toronto 888.425.2262